

# COMMUNICATION & MANAGEMENT



## **PABX**

- Private Automatic Branch Exchange

## **CTI**

- Computer Telephone Integrated ( CTI)
- Business Management System( hardware & software)

# Provider of affordable Telephone Systems for the home or office

## TC-2000K Series PABX



### TC-2000AK

#### Model:


- TC-308AK ( 3 CO lines + 8Extensions )
- TC-416AK ( 4 CO lines + 16Extensions )



### Main Functions:

- KTS & SLT compatible, plug and play
- Call management software
- Caller ID transferred
- Auto Fax detect
- Least cost routing
- Personal account
- IP code access automatically
- Outgoing call class
- Outside ( CO ) Line Duration TimeLimit
- Various Outside ( CO ) line access mode
- Speed dialing
- Outside caller call extension by one touch
- Executive busy override
- Hot line ( call operator by off-hookonly)
- Extension password
- Busy transferred
- Unconditional Transferred
- Call Transferred to Secretary
- Do Not Disturb(DND)
- Day and Night service
- Operator attendant
- Auto attendant
- Extension ring by turns
- Party Conference ( between 2exts & 1C.O )
- Party Conference ( among 3 extensions)
- One touch call operator
- Ringback on busy ( when Ext.becomes free)
- Call picked up by non-ring extension
- External music on hold socket
- Monitor voice record
- Remote program
- Extension number assignable
- Eight ringing extensions assignable
- Broadcast
- Twin routes 3 section OGM (DISA)
- Self-extension number confirmation
- Pulse and tone mode setting
- Polarity Reverse Detection (for billing)
- Support backup battery (for HK,VK,DK)
- Power failure ( some C.O & extensions on duty, for AK)
- Card expandable structure (for HK, VK,DK)

Note: Only version 2.0 TC-2000DK has personal account function.



Ext.line card



Tone card



C.Oline card



### TC-2000DK

#### Capacity:

- Card Expandable Structure
- From 8 to 16 CO lines
- From 32 to 128 Extensions
- Has 8 ports in per CO line or extension card



Ext.line card



C.Oline card



Tone card



### TC-2000HK(Support GSM)

#### Capacity:

- Card Expandable Structure
- From 2 to 6 CO lines, 4 to 32 Extensions
- Has 2 CO line ports in per CO line card
- Has 4 Extension line ports in per Extension card



C.Oline card




Ext.line card



### TC-2000VK

#### Capacity:

- Card Expandable Structure
- From 8, to 16 CO lines From 32 to 64 Extensions
- Has four RJ11 ports in per extension or C.O line card, but each port support 2 extensions or C.O lines

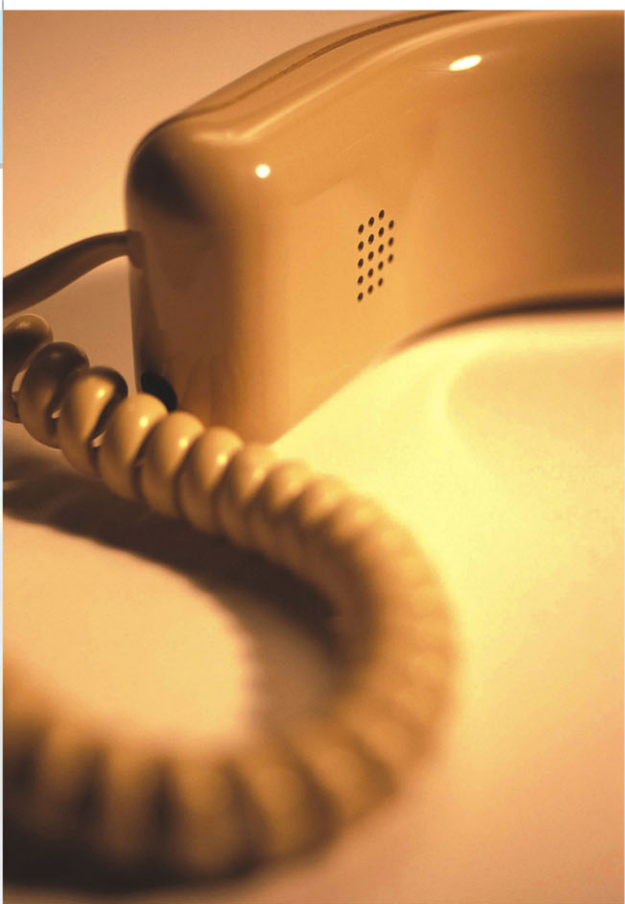

## TC-2000P series PABX



(Back view)

### TC-2000P

#### Main Functions:

- Busy transferred
- Password program
- Outgoing message
- Call pickup
- Outgoing time controlled
- Various outgoing mode
- Outgoing call class
- Executive busy override
- CO line ringing assignment

#### Model:

- TC-208P
- TC-308P
- TC-312P
- TC-416P
- TC-424P
- TC-432P

- Call transfer
- Three way conference
- Seven communication path
- Caller ID
- Music on holding
- Extension number assignable
- Auto report extension number
- Power failure transfer

## Key Telephone Series



KP-07A

#### Model:

- KP-07(0308)  
total has 11 DSS buttons for PABX TC-308AK model
- KP-07(0416)  
total has 20 DSS buttons for PABX TC-416AK model
- KP-07(0624)  
total has 30 DSS buttons for PABX TC-2000HK series
- KP-07(1614)  
total 30 DSS button for  
PABX TC-2000DK or TC-2000VK series
- KB-96  
total 96 DSS buttons for PABX TC-2000DK or  
TC-2000VK series, compatible with KP-07  
(1614) model.

#### Model:

- KP-06A (0308)  
total 11 DSS buttons for PABX TC-308AK model
- KP-06A (0416)  
total 20 DSS buttons for PABX TC-416AK model
- KP-06A (0632)  
total 38 DSS buttons for PABX TC-2000HK series
- KP-06A (1632)  
total 48 DSS buttons for PABX TC-2000DK or TC-2000VK series

- Compatible two-wire ordinary phone line
- Any extension support keyphone, plug and play
- On-hook dialing
- Various working mode
- No Answer Transferred
- Call on holding
- Redial / Callback
- Paging ( telephone conference )

- Two times alarm clock
- Do not disturb (DND)
- Interior message(SMS)
- Automatic timing
- Personal Password
- Call record
- Click dialing
- Caller name display
- Telephone book
- Programmable DSS button
- Earphone compatible
- System state display, LED indicator
- Extension melody ringer
- 3.5 inch big screen LCD display
- Calendar, Date, Time, Week Display



KP-06A



KB-96

KB-96 has 96pcs DSS buttons.

\* KB-96 + KP-07A(1614) = 126pcs DSS buttons.

Note: KP-07A(1614)has 30pcs DSS buttons.

**Main Functions:**


- Single line telephone (SLT) compatible
- Call management software
- Caller ID transferred
- Auto Fax detect
- Least cost routing
- Personal account
- Call on holding
- IP code access automatically
- Outgoing call class
- Outside ( CO ) Line Duration Time Limit
- Various Outside ( CO ) line access mode
- Speed dialing
- Outside caller call extension by one touch
- Executive busy override
- Hot line ( call operator by off-hook only)
- Extension password
- Busy transferred
- Unconditional Transferred
- Call Transferred to Secretary
- Do Not Disturb(DND)
- Day and Night service
- Operator attendant
- Auto attendant
- Extension ring by turns
- Party Conference ( between 2exts & 1C.O )
- Party Conference ( among 3 extensions)
- One touch call operator
- Ringback on busy ( when Ext.becomes free)
- Call picked up by non-ring extension
- External music on hold socket
- Monitor voice record
- Remote program
- Extension number assignable
- Eight ringing extensions assignable
- Broadcast
- Twin routes 3 section OGM (DISA)
- Self-extension number confirmation
- Pulse and tone mode setting
- Polarity Reverse Detection (for billing)
- Support backup battery (for HC,BC)
- Power failure ( some C.O & extensions on duty, for AC)
- Card expandable structure (for HC,BC)

**TC-2000C Series PABX**

**TC-2000BC**

**Capacity:**

- Card Expandable Structure;
- From 8 to 16 CO lines,
- From 8 to 128 Extensions;
- Has 8 CO/Ext line ports in per card.

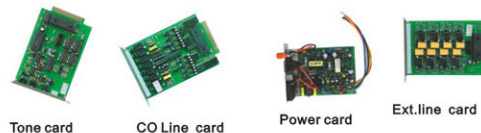

**TC-2000AC**

**Model:**

- TC-308AC ( 3 CO lines + 8 Extensions )
- TC-416AC ( 4 CO lines + 16 Extensions )
- TC-432AC ( 4 CO lines + 32 Extensions )



**TC-2000HC(Support GSM)**

**Capacity:**

- Card Expandable Structure;
- From 2 to 6 CO lines, 4 to 32 Extensions;
- Has 2 CO line ports in per CO line card;
- Has 4 Extension line ports in per Extension card.

**SOHO Series**



(Back view)



**SOHO**

**Main Functions:**

- Speed Dialing
- Assistant dialing
- Call Pickup
- Call Transfer
- Three party conference
- Outgoing call class
- Outgoing time controlled
- Autoadd IP code
- Auto detect fax signal
- Caller ID
- Operator attendant
- Auto-attendant mode
- Music on holding

**Models:**

- TC-104C / TC-106C / TC-108C (single communication path)
- TC-206D (three communication path)

Note: Speed dialing, IP dialing and Auto-detect fax are not available for TC-206D





## **Business Management System (BMS) Computer Telephone Integrated (CTI) Software**

### **S96A**



#### **Features**

- Two PSTN connection
- Customer Management
- Email Management
- Operations Management (purchase, sell and store system)
- TTS Voice Navigation
- Dialing by Mouse (full automatic)
- VOIP
- Used as Host when Networking

### **S96B**



#### **Features**

- One PSTN & one bluetooth connection
- Customer Management
- Email Management
- Operations Management (purchase, sell and store system)
- TTS Voice Navigation
- Dialing by Mouse (full automatic)
- VOIP
- Used as Host when Networking

### **S97A**



#### **Features**

- One PSTN connection
- Customer Management
- Email Management
- Dialing by Mouse (full automatic)
- VOIP
- Used as Host when Networking

### **S97B**



#### **Features**

- Two PSTN connection
- Customer Management
- Email Management
- Dialing by Mouse (full automatic)
- VOIP
- Used as Host when Networking

### **S98A**



#### **Features**

- One PSTN connection
- Compatible with single line phone (SLP)
- Customer Management
- Dialing by Mouse (semi-automated)
- Used as Host when Networking

### **S98B**



#### **Features**

- One PSTN connection
- Compatible with single line phone (SLP)
- Customer Management
- Dialing by Mouse (semi-automated)
- VOIP (for S98 B)
- Used as Host when Networking

